

Power Line SPDs

SSD1-2PG-M

45001201




SPD Specific Disconnecter-F (SSD), Type1+2, Iimp 12,5 kA, 2 Poles, Ue 500Vac, Iscrr 100kA, Itrip 500A with Microswitch

GENERAL DATA	
Internal configuration	1+1
No. Poles	2-Pole
No. DIN rail modules	2
Network configuration	TT, TN, IT
IEC SSD-F	Type 1+2
SSD Format	Cylindrical
Protection Modes	L-N, L-PE(N), N-PE
Product standards	*prIEC TS 61643-06



SURGE PROTECTION DEVICE (SPD) - IEC TECHNICAL FEATURES

Rated operational voltage AC (50/60Hz) - Ue [V]	500
Nominal discharge current (8/20)- In [kA]	20
Lightning impulse current (10/350) - Iimp [kA]	12.5
Short circuit withstand- Iscrr [kA]	100
Minimum operating current - Itrip [A]	500
SPD Maximum operating voltage AC (50/60Hz) - Uc [V]	175 / 275 / 320 / 440
Max. Let-through current per pole [kA]	17,08
Total I2t per pole [kA2s]	85,28
SPD Type	1+2

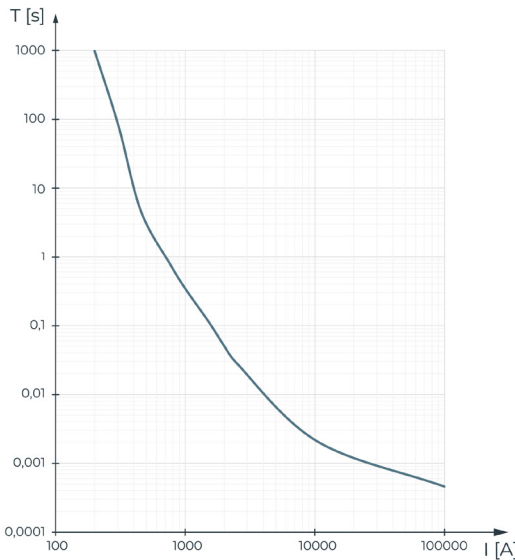

DATASHEET




SSD1-2PG-M

45001201

MECHANICAL AND ENVIRONMENTAL FEATURES


Temperature range [°C]	-40 ... 80
Humidity range [%]	5 ... 95
Max. Altitude [m]	2000
Indication System Type	Red (replace) / Not Red (OK), Microswitch
Insulating material	PA6 CT1 & PA66 CT1
Enclosure - IP	IP20
Overvoltage Category	III
Pollution degree	2
Flammability class	UL94 V-0
Solid conductor cross section	1,5...35mm²
Stranded conductor cross section	1,5...25mm²
Torque rating [N m]	3.5
Remote indication switching capacity [V/A]	AC: 240/2.5 DC: 24/3

DIMENSIONS AND WEIGHT

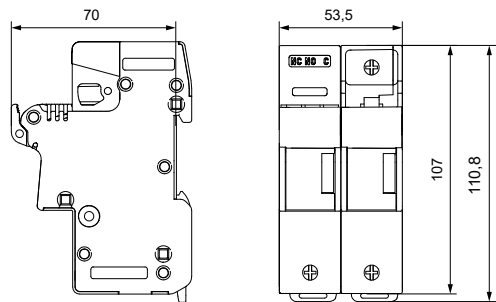

Net Weight [kg]	0.41
Gross weight [kg]	0.46
Packaging dimensions (H x W x L) [mm]	120 × 80 × 180

INTERNAL CONFIGURATION



SSD1-3P-M

45001301




SPD Specific Disconnector-F (SSD), Type1+2, Iimp 12,5 kA, 3 Poles, Ue 500Vac, Isccr 100kA, Itrip 500A with Microswitch

GENERAL DATA	
Internal configuration	3+0
No. Poles	3-Pole
No. DIN rail modules	3
Network configuration	TT, TN, IT
IEC SSD-F	Type 1+2
SSD Format	Cylindrical
Protection Modes	L-N, L-PE(N), N-PE
Product standards	*prIEC TS 61643-06



SURGE PROTECTION DEVICE (SPD) - IEC TECHNICAL FEATURES

Rated operational voltage AC (50/60Hz) - Ue [V]	500
Nominal discharge current (8/20)- In [kA]	20
Lightning impulse current (10/350) - Iimp [kA]	12.5
Short circuit withstand- Isccr [kA]	100
Minimum operating current - Itrip [A]	500
SPD Maximum operating voltage AC (50/60Hz) - Uc [V]	175 / 275 / 320 / 440
Max. Let-through current per pole [kA]	17,08
Total I2t per pole [kA2s]	85,28
SPD Type	1+2

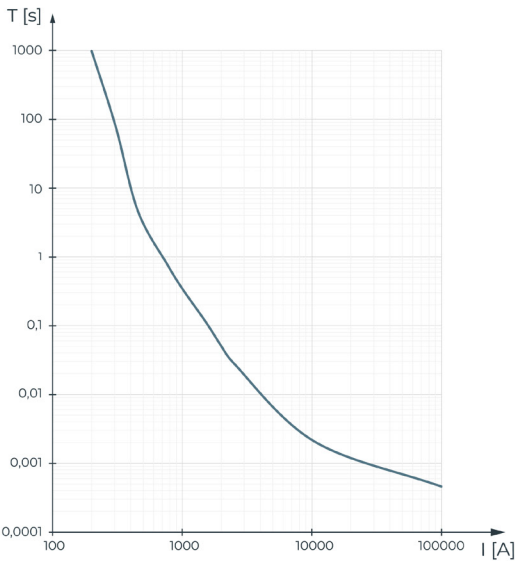


DATASHEET

MECHANICAL AND ENVIRONMENTAL FEATURES


Temperature range [°C]	-40 ... 80
Humidity range [%]	5 ... 95
Max. Altitude [m]	2000
Indication System Type	Red (replace) / Not Red (OK), Microswitch
Insulating material	PA6 CT1 & PA66 CT1
Enclosure - IP	IP20
Overvoltage Category	III
Pollution degree	2
Flammability class	UL94 V-0
Solid conductor cross section	1,5...35mm²
Stranded conductor cross section	1,5...25mm²
Torque rating [N m]	3.5
Remote indication switching capacity [V/A]	AC: 240/2.5 DC: 24/3

DIMENSIONS AND WEIGHT

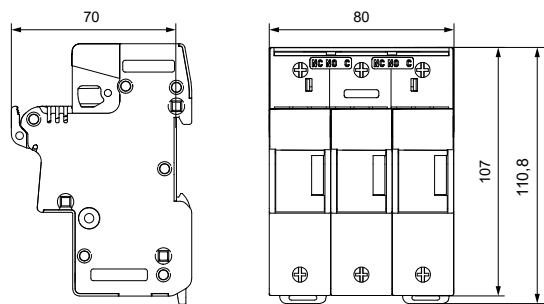

Net Weight [kg]	0.56
Gross weight [kg]	0.61
Packaging dimensions (H x W x L) [mm]	120 × 80 × 180

INTERNAL CONFIGURATION



SSD1-4PG-M

45001401

SPD Specific Disconnecter-F (SSD), Type1+2, Iimp 12,5 kA, 4 Poles, Ue 500Vac, Iscrr 100kA, Itrip 500A with Microswitch




GENERAL DATA	
Internal configuration	3+1
No. Poles	4-Pole
No. DIN rail modules	4
Network configuration	TT, TN, IT
IEC SSD-F	Type 1+2
SSD Format	Cylindrical
Protection Modes	L-N, L-PE(N), N-PE
Product standards	*prIEC TS 61643-06



SURGE PROTECTION DEVICE (SPD) - IEC TECHNICAL FEATURES

Rated operational voltage AC (50/60Hz) - Ue [V]	500
Nominal discharge current (8/20)- In [kA]	20
Lightning impulse current (10/350) - Iimp [kA]	12.5
Short circuit withstand- Iscrr [kA]	100
Minimum operating current - Itrip [A]	500
SPD Maximum operating voltage AC (50/60Hz) - Uc [V]	175 / 275 / 320 / 440
Max. Let-through current per pole [kA]	17,08
Total I2t per pole [kA2s]	85,28
SPD Type	1+2

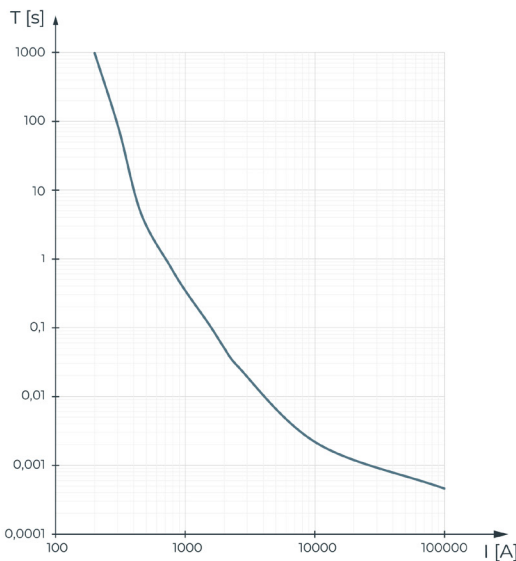


Power Line SPDs

SSD1-4PG-M

45001401

MECHANICAL AND ENVIRONMENTAL FEATURES	
Temperature range [°C]	-40 ... 80
Humidity range [%]	5 ... 95
Max. Altitude [m]	2000
Indication System Type	Red (replace) / Not Red (OK), Microswitch
Insulating material	PA6 CT1 & PA66 CT1
Enclosure - IP	IP20
Overvoltage Category	III
Pollution degree	2
Flammability class	UL94 V-0
Solid conductor cross section	1,5...35mm²
Stranded conductor cross section	1,5...25mm²
Torque rating [N m]	3.5
Remote indication switching capacity [V/A]	AC: 240/2.5 DC: 24/3

DIMENSIONS AND WEIGHT		
	Net Weight [kg]	0.71
	Gross weight [kg]	0.78
	Packaging dimensions (H x W x L) [mm]	120 × 80 × 180

